



Test Item

Test Method

Unit




SF305R

SF305R Halogen-free type polyimide film

Product Code Description

SF305R 50 25



Adhesive Thickness: 25 - 25 μ m; 35 - 35 μ m
PI film Thickness: 50 - 125 μ m; 90 - 300 μ m


Shengyi Halogen-free Stiffener Designation

SPECIFICATIONS OF STANDARD PRODUCTS


Specifications	PI film Thickness (μ m)	Adhesive Thickness (μ m)
SF305R 3025	75	25
SF305R 4025	100	25
SF305R 5025	125	25
SF305R 6025	150	25
SF305R 7025	175	25
SF305R 8025	200	25
SF305R 9025	225	25
SF305R A25	250	25
SF305R B25	275	25
SF305R C25	300	25
SF305R 3000	75	00
SF305R 4000	100	00
SF305R 5000	125	00
SF305R 6000	150	00
SF305R 7000	175	00
SF305R 8000	200	00
SF305R 9000	225	00
SF305R A00	250	00
SF305R B00	275	00
SF305R C00	300	00

PRESS PROPOSE

HOT PRESSING CYCLE

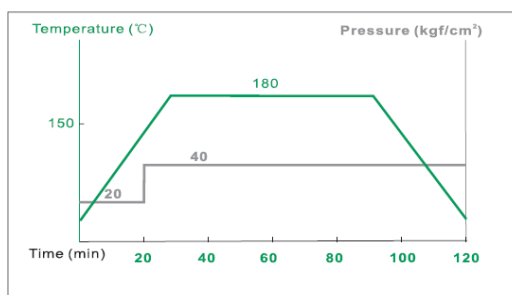

FAST PRESSING CYCLE

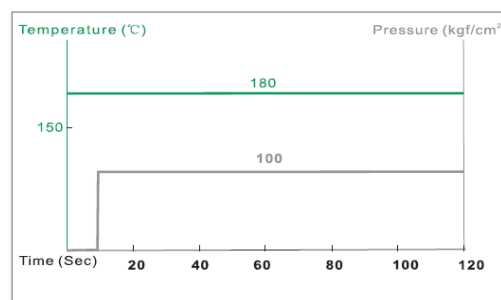



SF305R

SF305R

Halogen-

The parameters of hot Pressure need to be adjusted according to different equipment and product specifications. After fast press, the curing condition is 160-170 for 60-90min.

PURCHASING INFORMATION

250+2/-0mm 500+2/-0mm 100+2/-0 200+2/-0
SF305R is supplied in rolls and standard width of 250+2/-0mm or 500+2/-0mm. Roll length is 100+2/-0m or 200+2/-0m. Other sizes could be available upon request.